




42V Single Voltage Configuration for Summit II 30600 Chargers

Lester Electrical 1/26/20

Overview:

Multi-volt Summit II Battery Chargers can be converted to single voltage chargers if end users do not require multi-volt operation. This document lists the programming step required for single-voltage operation in 42 volt applications.

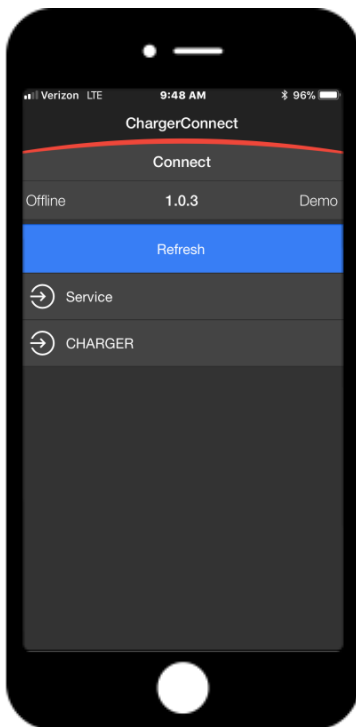



Step #1:

Enable the Bluetooth® wireless option on your smart device and launch the ChargerConnect™ App. Select your charger from the drop down list (default name will be the serial number of your charger) and select it to establish communication with your charger

Step #2:

Allow the Dashboard to populate with real time data from your charger, observe the battery profile number listed on the display, the default profile number will be 22251. The battery profile must be changed to 22750 for 42 VDC single voltage operation.

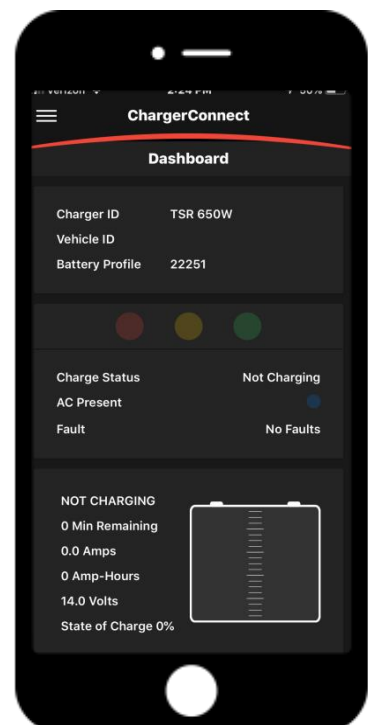


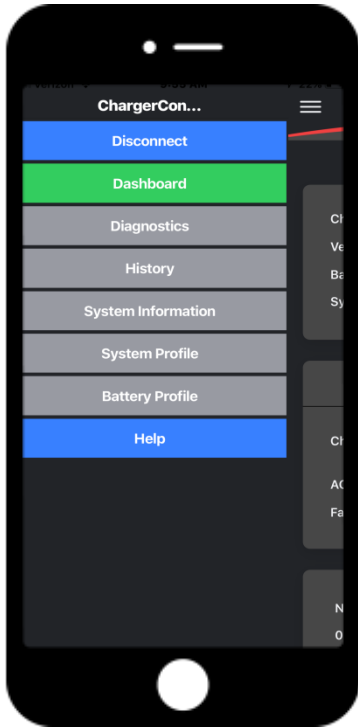


Step #3:

Press the 3 lines in the upper left hand corner to view the drop down menu and select "Battery Profile"


Step #4:

Allow the Dashboard to populate with real time data from your charger and press the "Cloud Profiles" selection on the bottom of the display

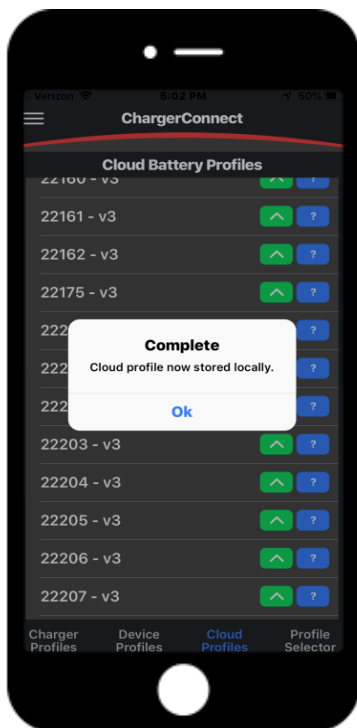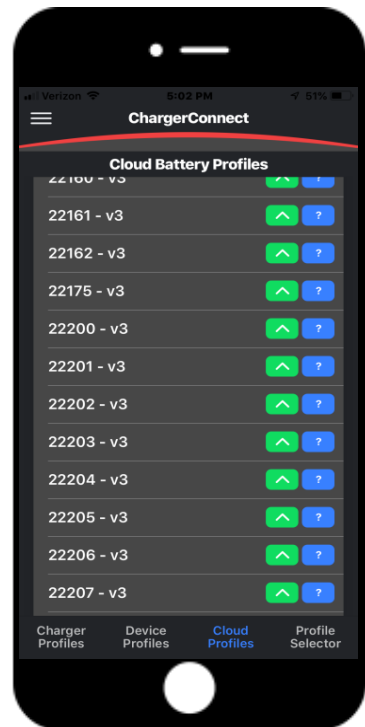

Step #5:

Find Battery Profile 22750 and press the green arrow key to the right to upload the profile to your device

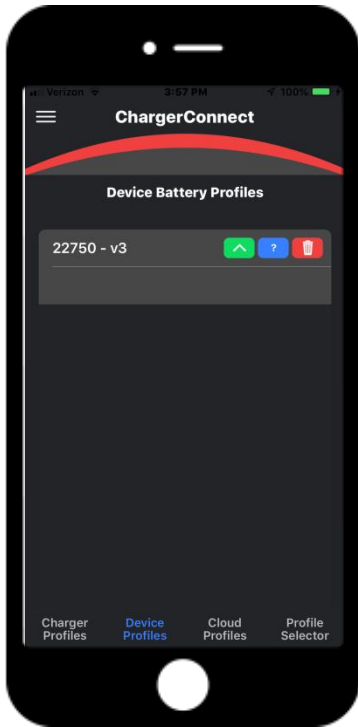


Step #6:

Press the “Device Profiles” selection from the bottom of the display, then touch the arrow key next to profile 22750 to upload it to your charger


Step #7:


The APP will the request additional information for the system profile setting, if your vehicle is a EZGO RXV Cart with a triangle DC Plug select “yes” if not select “no”

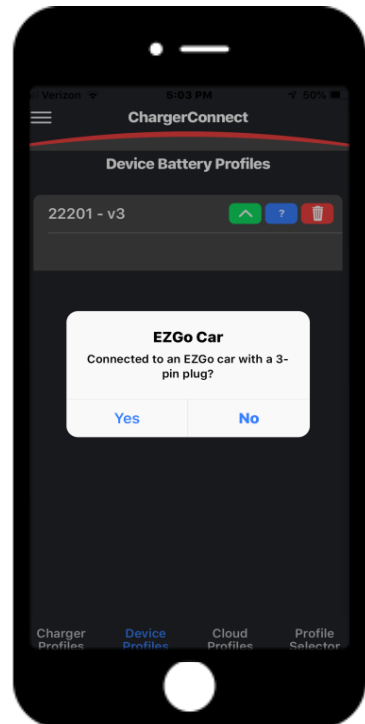

Step #8:

The APP will then ask for storage slot number for the profile to be transferred to your charger, enter “11”

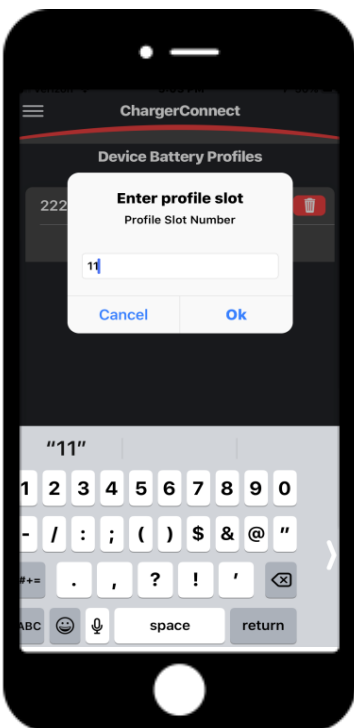


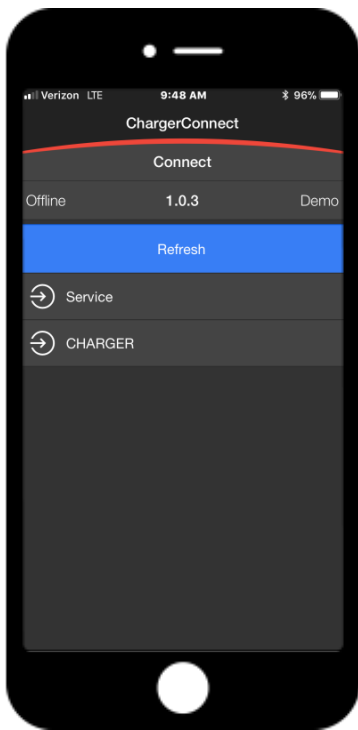


Step #9:

The APP will then reboot the charger to assign the new battery profile. Once this action is complete, touch the serial number of the charger to re-establish communication


Step #10:

Once the charger is online, verify the proper battery profile is installed

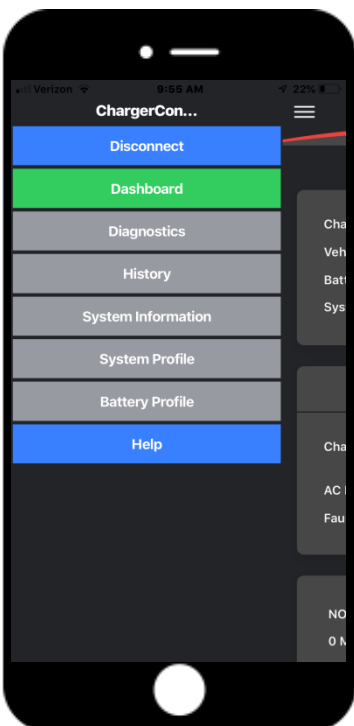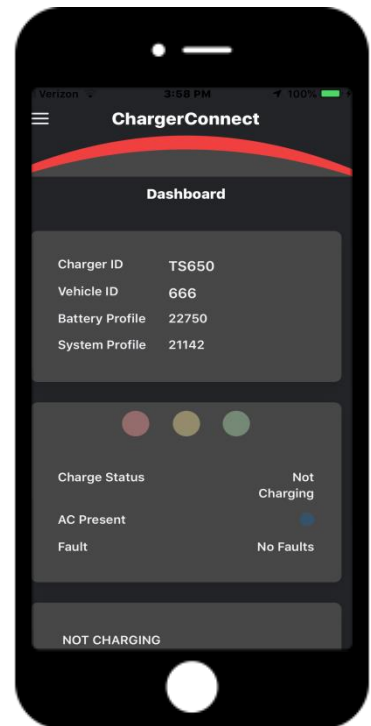

Step #11:

Press the three lines in the upper left hand corner to view this drop down menu, this time go to "System profile"


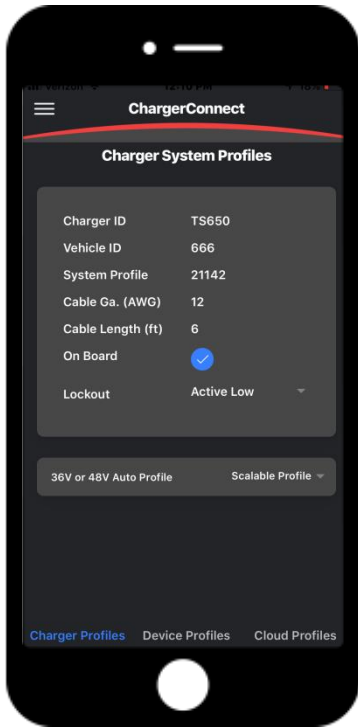


Step #12:

Find the 36V or 48V Auto Profile and press the down arrow next to the “Scalable “ selection and view the drop down menu


Step #13:

Select “Off” from the menu and press OK

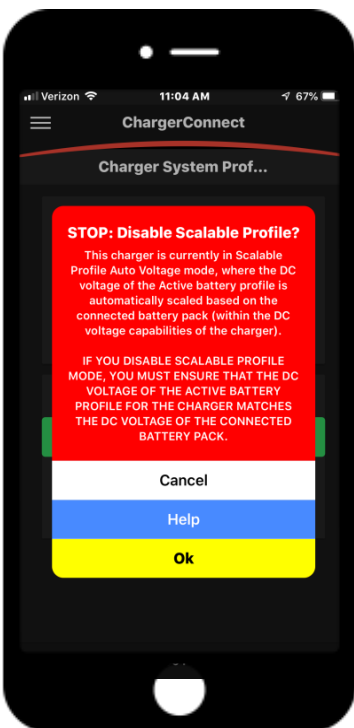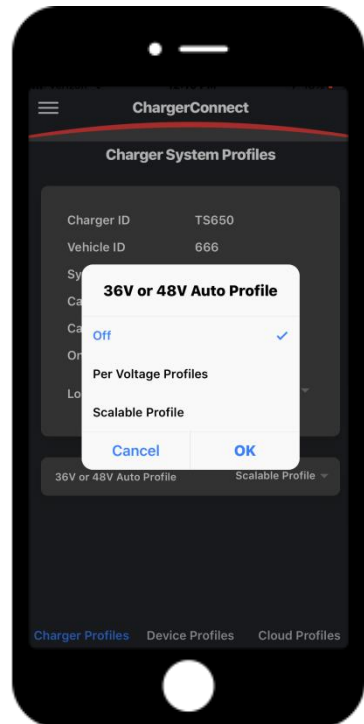


Step #14:

A “Disable Scalable Profile” warning will appear to acknowledge the change request, select OK to proceed

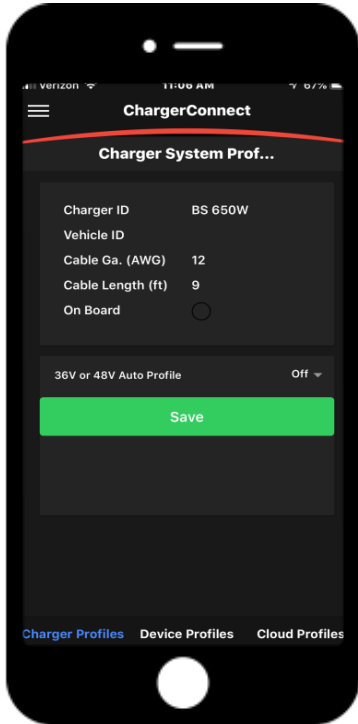


Step #15:

Press the “Save” button to register the change

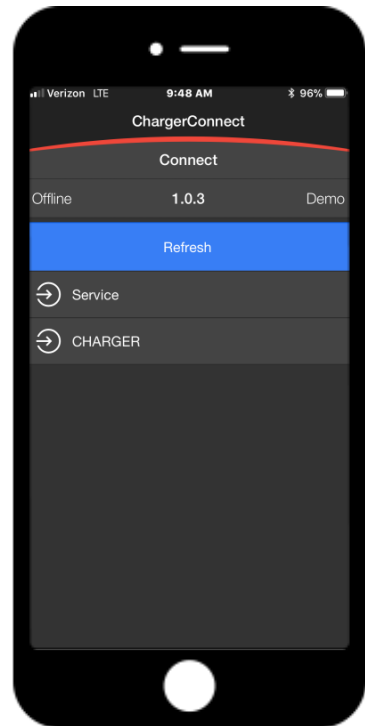

Step #16:

The charger will once again reboot to register the change. The charger will now operate in 42 V Mode only

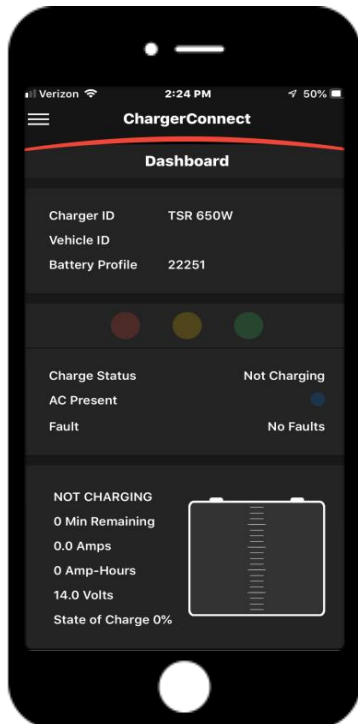

Step #17:

To view operation of the charger, Log back in, the charger should no longer identify a detected battery pack voltage